



O/E/N 68

MINIATURE POWER RELAY

- International Standard Foot Print
- Compact High Performance
- Direct PCB type
- Dust Protected / Sealed
- Special Contact gap of 1.5mm

SPECIFICATIONS

Contact Arrangement	: 2 Form A, 2 Form C
Contact Material	: Silver Alloy (Gold Flash)
Contact Rating	
Rated Voltage	: 230 V AC/24 VDC
Maximum Voltage	: 440 V AC/220 V DC
Maximum Continuous Current at 230VAC/24VDC	
2 Form A	: 8A
2 Form C	: 6A
Maximum Power Rating	
2 Form A	: 2000VA
2 Form C	: 1500VA
Nominal Coil Power	: 0.5W (approx)
Operating Power	: 0.4W (approx)
Life Expectancy	
Mechanical	: 10^7 operations
Electrical	
2 Form A	: 10^5 operations
2 Form C	: 1.2×10^5 operations
Contact Resistance (Initial)	: 50 milli Ohms
Dielectric Strength	
Between Contacts & Coil	: 4000 VRMS
Between Contact/Contact	: 2500 VRMS
Insulation Resistance	: 500 Meg.Ohms at 500VDC, 25°C, RH50
Operate time at Nominal Voltage	: 8 milli sec.(Typ)
Release time at Nominal Voltage	: 2.7 milli sec.(Typ)
Ambient Temperature	: -45°C to +70°C
Weight	: 20 gms (approx)

Typical applications


Industrial Electronics, PLCs, Timers, Office Automation, UPS, Home Appliances

All dimensions are in mm. Specifications subject to change without notice.


COIL DATA

Nominal Voltage VDC	Pick-up Voltage VDC (Max)		Coil Resistance at 20°C Ohms ± 10%	
	2 Form C	2 Form A	2 Form C	2 Form A
6	5	4.5	70	70
12	10	9.0	150	185
24	20	18	600	700
48	40	36	2400	2800

CIRCUIT DIAGRAMS




2 Form A




2 Form C


HOW TO ORDER

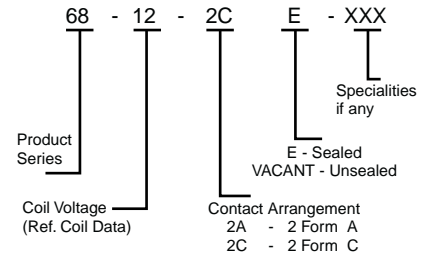


DIMENSIONS

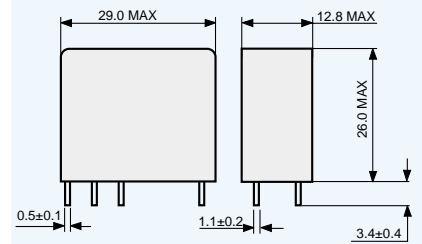

DRILLING PATTERN

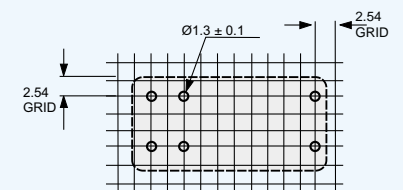

2 Form A

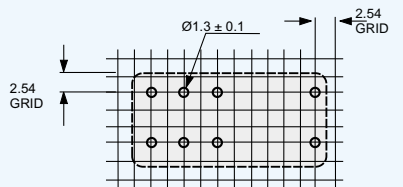

2 Form C